



Republika ng Pilipinas
Republic of the Philippines
Kagawaran ng Tanggulang Pambansa
Department of National Defense

Request for Quotation

25 June 2018

Greetings:

For a negotiated procurement under Section 53.9 (Small Value Procurement) of the 2016 Revised Implementing Rules and Regulations (RIRR) of Republic Act (RA) 9184, please quote your lowest price on the **lot item** listed below, subject to the General and Special Conditions, as required.

You should be able to submit a sealed quotation, duly signed by your authorized representative to the Negotiation Team at the DND Proper BAC Conference Room, Beside DND Multi-Purpose Center, DND, Camp General Emilio Aguinaldo, Quezon City, not later than **02:00 PM on 02 July 2018 (Monday)**.

Lot No.	Nomenclature	QTY	ABC (In Php)
1	Supply/ Installation of Steel Fence and CHB Wall at DISG (see supplier's quotation for details)	1 lot	159,087.00
GRAND TOTAL			159,087.00

General and Special Conditions:

- All entries must be legibly written.
- Supply/ Installation of Steel Fence and CHB Wall at DISG must be completed within thirty (30) calendar days upon receipt of the Notice to Proceed and Job Order.
- Price validity shall be for a period of not less than sixty (60) calendar days from the date of quotation.
- Proponent must submit, together with its Quotation, the following:
 - Certified true copy** of Mayor's/ Business Permit;
 - Certified true copy** of the proof of PhilGEPS Registration Number;
 - Certified true copy** of the PCAB License;
 - Certified true copy** of the latest Income/ Business Tax Returns; and
 - Original copy** of a **duly accomplished and notarized** Omnibus Sworn Statement (with Secretary's Certificate or Special Power of Attorney) in the form prescribed under the 2016 RIRR of RA 9184.
- The proponent or its authorized representative should sign each and every page of the attached drawings and detailed specifications.
- The proponent or its **authorized representative(must have a board resolution/SPA) should be present during the negotiation/ opening of quotations**; otherwise, the submitted quotation will not be opened and will be considered ineligible to participate in the process.

FOR THE CHAIRPERSON:

WAHAB SHERWIN S. SURIAN, JR.
Head, DND Proper BAC Secretariat

SUPPLIER'S QUOTATION

LOT NO.	NOMENCLATURE	QTY	COMPLY/ NOT COMPLY	Total Price (In Peso)	
1	Supply/ Installation of Steel Fence and CHB Wall at DISG		1 LOT		
	SCOPE OF WORK				QTY
	I. Supply/ Installation of Steel Fence	60.60 sq.m.			
	II. Concrete Post and Footing	2.23 cu.m.			
	III. CHB Wall and Canal With Steel Matting Top Cover	33.60 sq.m.			
	IV. Painting Works	27.09 sq.m.			
	V. Clearing and Disposal	1.00 lot			
	VI. Mobilization/ Demobilization	1.00 lot			
	Drawings <i>(see attached for details)</i>				
	Detailed Specifications <i>(see attached for details)</i>				
	The Contractor shall employ Key Personnel such as Project Supervisor (Engineer, Foreman, Capataz and/or Leadman) and highly skilled workers (carpenter, mason, electrician, plumber, painter, etc) who will be assigned during the execution until the completion of the project. These personnel shall not be utilized in other projects while the on-going project has not yet been completed.				
GRAND TOTAL -----					

DELIVERY PERIOD : _____ calendar days
PRICE VALIDITY : _____ calendar days

After having carefully read, understood and accepted the General and Special Conditions, I/We quote at prices as above-indicated.

Printed Name/Signature

Business Address

Telephone No./Mobile No./E-Mail Address

Date

6" THK. C-B WALL


EXISTING RUBRAP

4FT HT. GA-4.5mm (3/16") 2"x2' STEEL MATTING
ON SCHED. 40 1 1/2" G.I. PIPE STEEL POST

GA-4.5mm (3/16") 2"x2' STEEL
MATTING COVER

6" THK. C-B CANAL

DISG FENCE

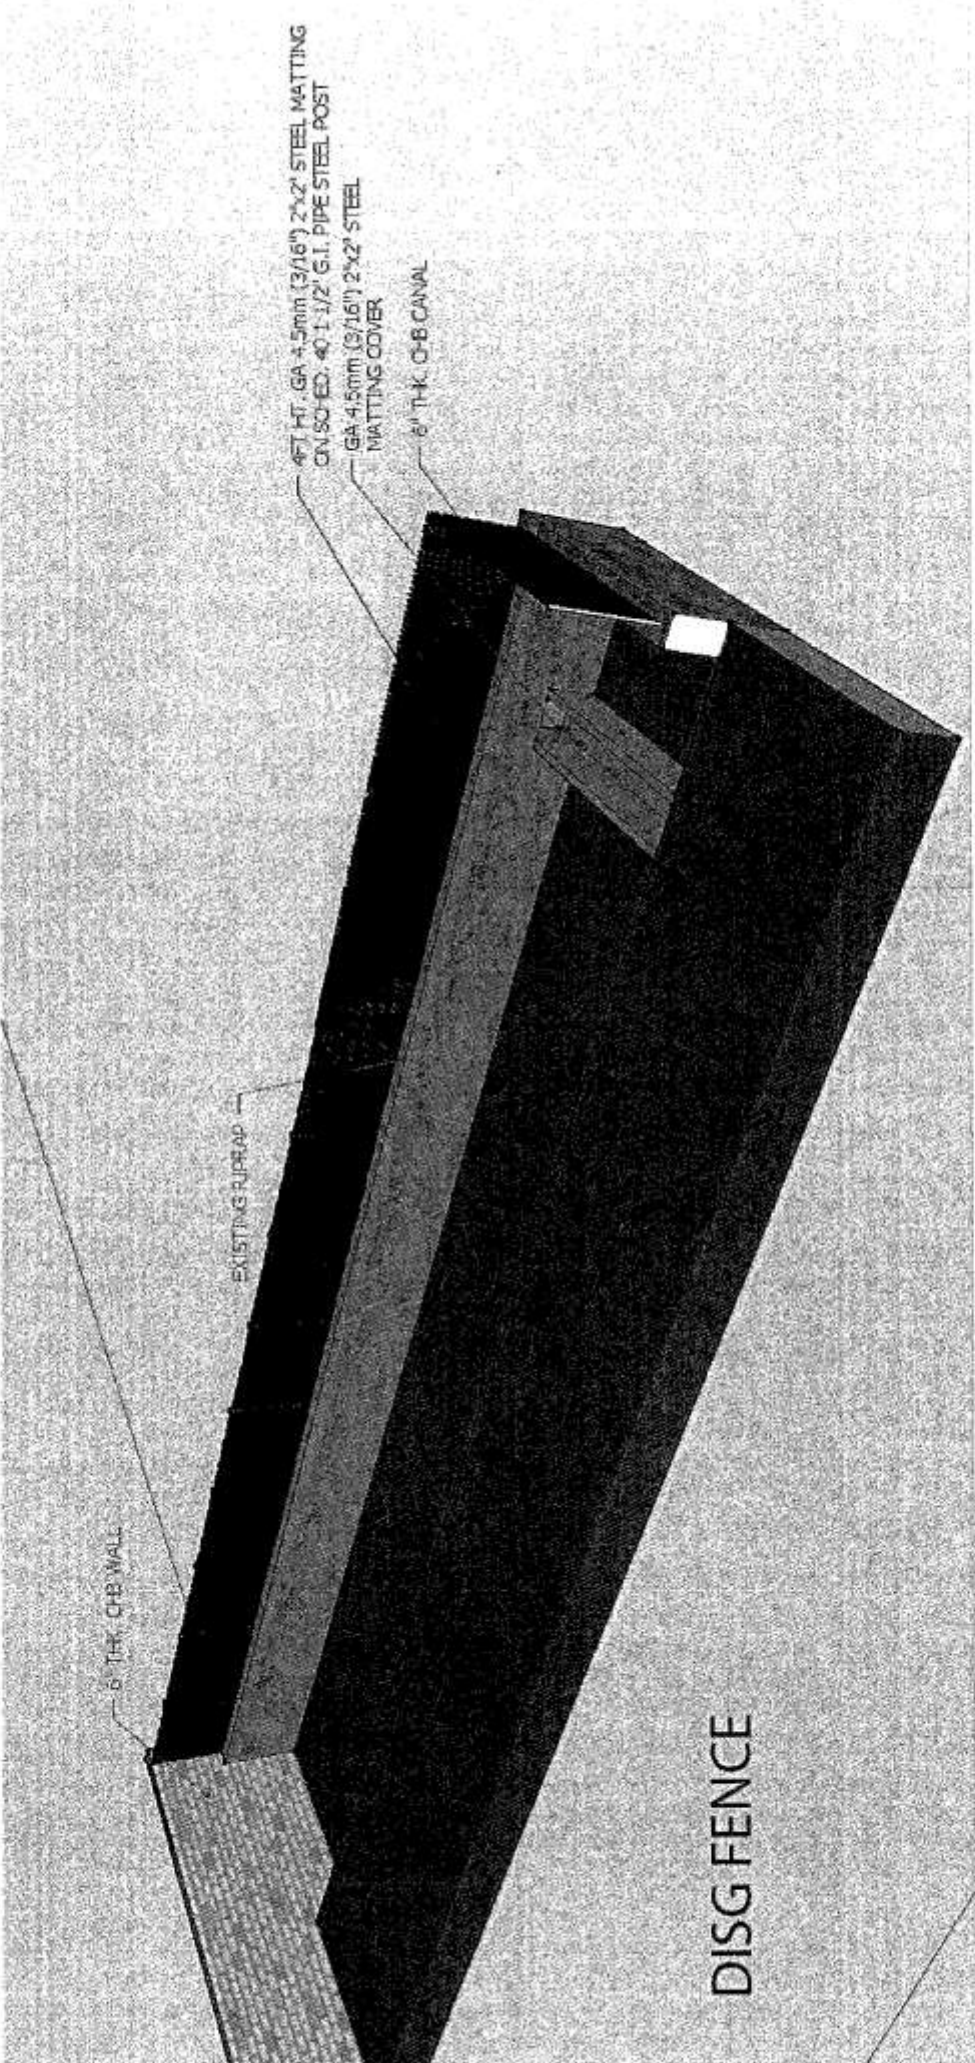

Republic of the Philippines
DEPARTMENT OF NATIONAL DEFENSE
Camp General Emilio Aguinaldo
Quezon City

SPECIFICATION FOR SUPPLY/INSTALLATION OF STEEL FENCE AND CHB WALL

SITE INSPECTION

1. The contractors/bidders shall conduct site survey/ocular inspection to assess and evaluate the site condition, works to be done as reference for bid estimate and execution.

SUPPLY/INSTALLATION OF STEEL FENCE

1. Use steel matting (2"x2") gauge 4.5mm, G.I. pipe 1 ½"x20' sch.40, flat bar 1"x ¼", welding rod and other consumables to complete the installation.

SUPPLY/INSTALLATION OF CONCRETE POST AND FOOTING

1. The concrete mixture should be "Class A".
2. Use 10mm Ø steel bar for vertical bar, base bar, top bar and 10mm Ø steel bar for lateral ties spacing at 0.20m on center. Use No.16 galvanized iron wire to secure the steel bars into its designed position.
3. Use Grade 33 for all reinforcement.

SUPPLY/INSTALLATION OF CHB WALL

1. Use "Class B Mixture".
2. Use 6" CHB including 10mm Ø steel bar for vertical and horizontal bar.
3. Use "Class B Mixture" for plastering with minimum thickness of 16mm.

PAINTING WORKS

1. Apply anti-rust solution for steel surface preparation.
2. Apply one coat red oxide or lead primer paint for steel matting, g.i. pipe and others.

3. Apply 2-coats of Quick Dry Enamel (QDE) for steel structures as a final finish to avoid rapid deterioration

CLEARING AND DISPOSAL

1. Before and after working hour, contractors shall always conduct and maintain cleanliness on working areas for safety and efficient movement of workers or any person who were using the place.
2. After completion of works, all refuse and garbage shall be clear, transport and dump to the contractor dumping site or otherwise area allocated by the implementing office, at contractor's expense.
3. Implementing office/representative together with the contractor will conduct preliminary inspection and punch listing after declaring completed, before the final acceptance.

OTHERS

1. All materials to be installed shall have an approved sample/brochure before the final installation including steel matting, G.I. pipe and others.